


机器简介

Introduction of the machine

- ◆ 采用爱普生I3200原装喷头
EpsonI3200 Printhead
- ◆ 高灵敏小车防撞装置
Anti-collision system
- ◆ 可调节喷头小车高度 (≤20mm)
Adjustable head height (≤20mm)
- ◆ 进口静音导轨及伺服一体电机
Imported mute rail and servo integrated motor
- ◆ 铝合金一体清洗墨栈
Big capacity bulk ink system
- ◆ 大功率一体烘干风扇
High-power integrated drying fan
- ◆ 科学的操作界面，简单方便操作。
Scientific operation interface, easy to operate
- ◆ 全新可变墨滴技术和三种羽化打印功能，使打印画面更真实细腻。
New variable ink drop technology and three feathering print functions make the print picture more realistic and delicate

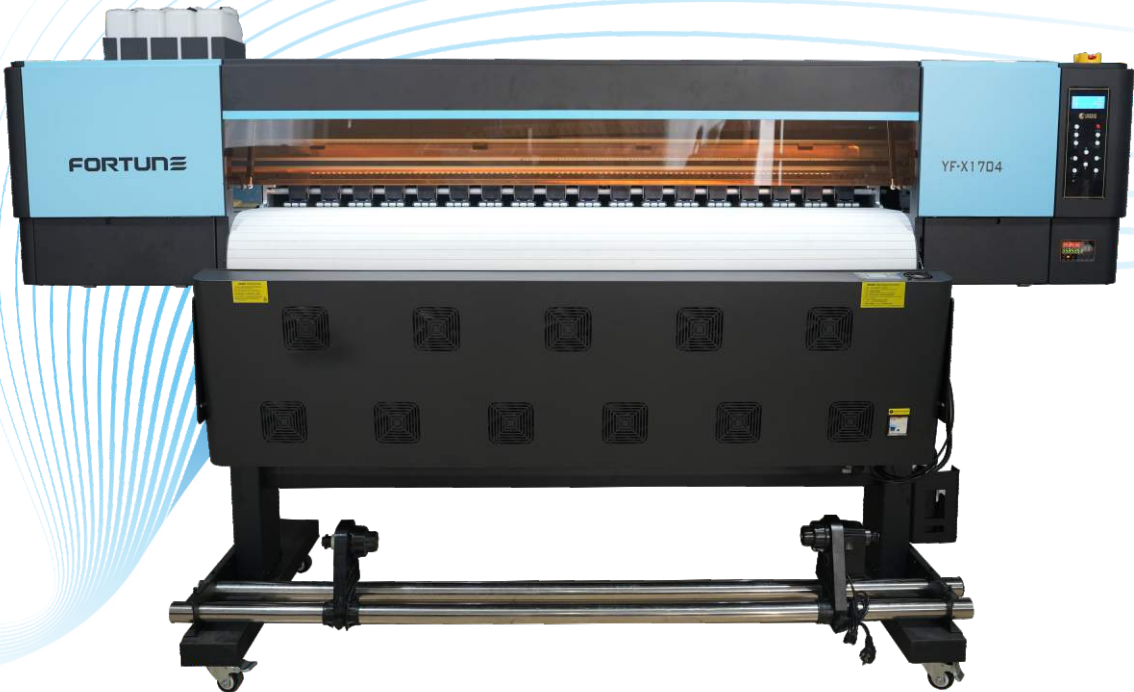

行业应用 Industry Application



PP背胶
PP



车贴
Vinyl



艺术画
Art Painting



灯箱
Light Box



易拉宝
Roll Up Banner

机器参数 Machine parameters

机型 Model		YF-X1704 8Color Printer	YF-X1704 4Color Printer
喷头型号 Print Head		Epson I3200-E1	
喷头数量 Print Head Number		4	4
色彩配置 Print Mode		4H*8C	4H*4C
打印宽幅 Print Width		1600mm	
打印速度 PrintSpeed (sqm/h)	草图 2PASS	/	106m²/h
	生产 3PASS	/	80m²/h
	标准 4PASS	30 m³/h	53m²/h
	高精 6PASS	25 m³/h	33m²/h
打印分辨率 Print Resolution		720*1800DPI	
打印材料 Media Type		车贴、灯箱布、网格布、单透贴、壁纸、油画布、相纸、PP等 Vinly, Flex Banner, Mesh, One Way Vision, Paper, Wall Paper, Coated Banner, Photo Paper etc.	
材料厚度 Media Thickness		材料厚度≤3mm Max≤3mm	
墨水类型 Ink Type		环保弱溶剂/环保热升华墨水/水性墨水 Eco-Solvent Ink/Sublimation ink/Water-based ink	
固化系统 Curing System		热烘干+冷风风扇 Heating Dryer+Cooling Fan	
输入格式 Film Format		BMP/TIFF/EPS/PDF/JPEG	
RIP软件 RIP		Photoprint/Onyx/Caldera/Colorget/Riin	
数据传送接口 Data Connector		千兆网线 Gigabit etherner	
输入电源 Voltage		220VAC(±10%)单相, 50/60 HZ 220VAC(±10%) Single Phase, 50/60 HZ	
机器功耗 Power		5KW	
机器尺寸/净重 Machine Size/N.W.		2.78m(L)*0.8m(W)*1.57m(H)280KG	
包装尺寸/毛重 Packing Size/G.W.		3.3m(L)*0.92m(W)*0.8m(H)310KG	
环境要求 Environmental Requirement		独立、洁净、低尘、少光照、通风良好的工作间 环境温度:20℃ - 25℃相对湿度: 50% - 60% seperated, clean, low dust, well-ventilated environmental temperature:20℃-25℃ relative humidity50% -60% (Non-condensation)	

注：以上技术参数如有变动恕不另行通知，以实际设备为准。
Above specification will be changeable without notice